


RT FLOOR SCALE

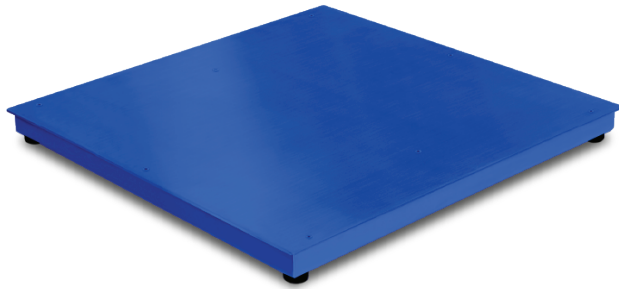

Electronic platforms suitable for weighing above ground in all types of industrial and commercial applications. Connectable to any weight indicator. The standard version is provided with approved load cells.

Indicator Features

- Stainless steel display device with IP67 protection (only BWS) and superior display size Flexible positioning, e.g free-standing or mounted to the wall
Full function: unit change, accumulation, checkweighing, simply counting, Gross/Net shift.
- Weighing with tolerance range (check - weighing) a visual and audible signal helps with portioning, dispensing or grading Hold function: When the weighing conditions are unstable, a stable weight is calculated determining an average value RS-232 interface can connect to PC or printer.
- Display : LCD display, digit height 52 mm. with white color LED backlight
- Power : AC adapter (12V500mA), rechargeable battery (lead acid battery 6V/4Ah), operation time 70 hours
- Operation temperature : 10°C/40°C



Technical Features

- Functioning with 4 shear-beam 3500ohm nickel-plated steel load cells, approved according to OIML R60 C3 standards (3000 divisions), IP67 protection degree.
- Monobloc structure with oven-fire painted steel tubular, adjustable resting feet, and level.
- Fixed sheet steel chequered load surface.
- Up to 15 Vdc power supply.
- Shielded 3m connection cable for connection to the indicator.
- Upon request:
 - platform calibration service with weight indicator; CE-M approval, to be combined always with the calibration service;
 - support column for indicator

Available Options

Dimensions (cm)	Range
1m x 1m	300Kg - 2000Kg
1.5m x 1.5m	1000Kg - 5000Kg
2m x 2m	2000Kg - 6000Kg

- Customized sizes will be manufactured on request basis

